


# DRA240 SERIES

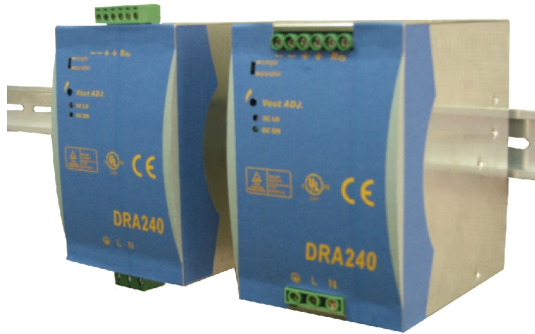

AC - DC DIN RAIL MOUNTABLE  
240W  
INDUSTRIAL CONTROL EQUIPMENT

## FEATURES

- COMPACT DESIGN
- HIGH EFFICIENCY UP TO 90%
- P.F.C. FUNCTION AVAILABLE
- PARALLEL FUNCTION AVAILABLE (SWITCH)
- INPUT VOLTAGE 115/230VAC AUTO SELECT

## SELECTION CHART

**DRA 240 - 24 x**

Wattage ☐

☐ A : SCREW TERMINALS  
☐ B : DETACHABLE CONNECTOR

24 : 24VOUT  
48 : 48VOUT

## MODEL LIST

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (typ.)	EFF. (min.)
Single Output Models						
DRA240-24x	115 / 230 VAC	240 WATTS	+ 24 VDC	10A	89%	87%
DRA240-48x	115 / 230 VAC	240 WATTS	+ 48 VDC	5A	90%	88%

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL					
Characteristics	Conditions	min.	typ.	max.	unit
Isolation voltage	Input / Output	3,000			VAC
Isolation resistance	Input / Output, @ 500VDC	100			MΩ
Ambient temperature	Operating at Vinom, Io 70%...100%	-10		+ 50	°C
Derating	Vi nom, Ionom +51 to +71°C			1.5	% / °C
Storage temperature	Non operational	-25		+ 85	°C
M.T.B.F.	According to MIL-HDBK-217F, GF40		200,000		Hrs
Relative humidity	Vi nom, Ionom	20		95	% RH
Dimension	Screw terminal type	L125 x W83 x D126			mm
	Detachable connector type	L142 x W83 x D126			mm
Cooling	Free air convection				
Case material	Metal				

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

### INPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Rated input voltage	Io nom		115 / 230(auto select)			VAC
Input voltage range	Ta min ... Ta max, Io nom	AC 115V selected	93		132	VAC
		AC 230V selected	186		264	VAC
		DC	210		370	VDC
Line frequency	Vi nom, Io nom		47		63	Hz
Inrush current	Vi nom, Io nom	Vi : 115VAC			24	A
		Vi : 230VAC			48	A
P. F. C.	Vi : 230VAC, Io nom			0.7		

### OUTPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Output voltage accuracy (Adjusted before shipment)	Vi nom, Io max		-0		+ 1	%
Minimum load	Vi nom		0			%
Line regulation	Io nom, Vi min ... Vi max				± 0.5	%
Load regulation	Vi nom, Io min ... Io nom	single mode			± 1	%
		parallel mode			± 5	%
Temperature coefficient	Vi nom, Io min				± 0.3	% / °C
Ripple & noise	Vi nom, Io nom, BW = 20MHz				100	mV
Hold up time	Vi nom, Io nom	Vi = 115VAC	25			ms
		Vi = 230VAC	30			ms
Voltage trim range	Vi nom, Io nom	24V models	22.5		28.5	VDC
		48V models	47		56	VDC
DC ON indicator threshold at start up	Vi nom, Io nom	24V models	17.6		19.4	VDC
		48V models	37		43	VDC
DC LOW indicator threshold after start up	Vi nom, Io nom	24V models	17.6		19.4	VDC
		48V models	37		43	VDC
Parallel operation	For parallel model only				3	unit
Efficiency	Vi nom, Io nom, Po / Pi		Up to 90%, See model list			

### CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse		T6.3A / 250VAC internal			
Rated over load protection	Vi nom	105		145	%
Power Rdy (for 24V model only)	Threshold voltage of contact closed(at start up)	17.6		19.4	VDC
	Electrical isolation	500			VDC
	Contact rating at 60VDC			0.3	A
Over voltage protection	Vi nom, Io nom	120		145	%
Output short circuit	Vi nom, Io nom	Current limited			

## SPECIFICATION


All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

## APPROVALS AND STANDARDS

UL / cUL	UL508 Listed
TUV	EN60950
CE	EN61000-6-3 EN61000-6-2 EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11

## CIRCUIT SCHEMATIC

• Block diagram for DRA240 series

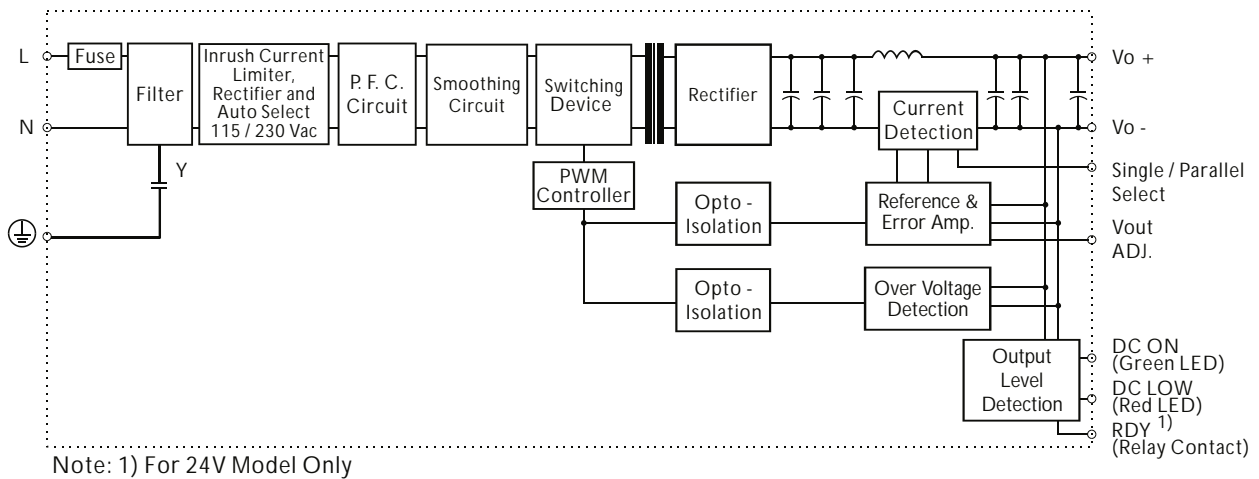

## PHYSICAL CHARACTERISTICS


### CASE SIZE

SCREW TERMINAL TYPE	125 x 83 x 126 mm 4.92 x 3.27 x 4.96 inches
DETACHABLE CONNECTOR TYPE	142 x 83 x 126 mm 5.59 x 3.27 x 4.96 inches

WEIGHT	1000g
--------	-------

## MECHANISM & PIN CONFIGURATION

mm [inch]

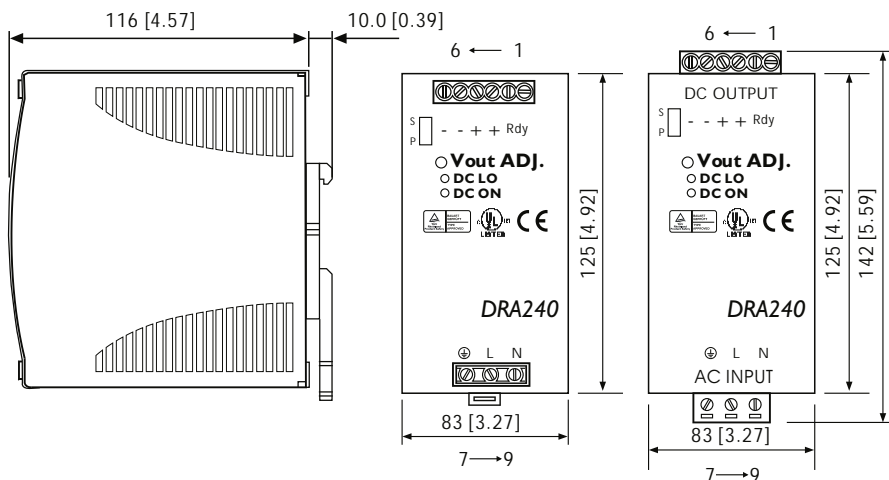

### CONSTRUCTION

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail.

### INSTALLATION

Ventilation / Cooling  
Normal convection  
Above/below 25m/m free space  
For cooling recommended  
Connector size range  
Screw terminal:  
10-24AWG flexible / solid cable,  
8 m/m stripping at cable end recommends  
Detachable connector:  
14-24AWG flexible / solid cable,  
7 m/m stripping at cable end recommends

## PIN ASSIGNMENT

PIN NO.	Designation	Description
1	OUT	RDY
2		A normal open relay contact for DC ON level control (Never connect except 24V model)
3		V +
4		V +
5	IN	V -
6		V -
7		⊕
8		L
9	OTHER	N
		DC ON
		DC LO
		Vout ADJ.
		S / P
		Operation indicator LED
		DC LOW voltage indicator LED
		Trimmer-potentiometer for Vout adjustment
		Single / Parallel select switch

## DERATING

